


FLOOR PLAN

— SCALE: 1/4" = 1'-0" —

LIVING AREA	2,409 SQ. FT.
GARAGE	776
COVERED PATIO & ENTRY	592
TOTAL AREA	3,777 SQ. FT.

MIN. HEADER OVER OPENINGS IN BEARING PARTITIONS SHALL BE (3) 2 X 12, UNLESS OTHERWISE SHOWN.
ALL GLASS TO BE TINTED

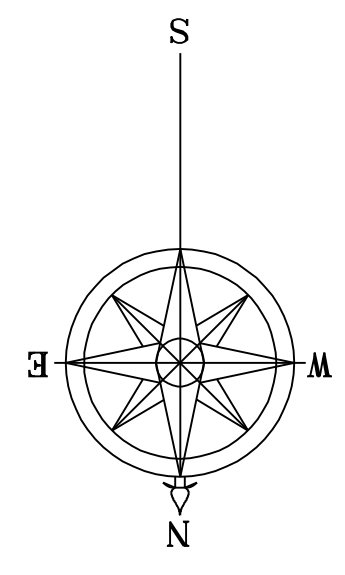

ACTUAL DESIGN PRESSURES FOR ALL EXTERIOR WINDOWS, DOORS, GARAGE DOORS AND SIMILAR ENVELOPE ELEMENTS				
OPENING AREA IN SQ. FT.	INTERIOR ZONE (I)		END ZONE (NOTE #1) (E)	
	POSITIVE	NEGATIVE	POSITIVE	NEGATIVE
△ 0 TO 15	+ 35.3 psf	- 38.2 psf	+ 35.3 psf	- 47.2 psf
△ 15 TO 20	+ 34.5 psf	- 37.5 psf	+ 34.5 psf	- 45.6 psf
△ 20 TO 35	+ 33.7 psf	- 36.7 psf	+ 33.7 psf	- 44.0 psf
△ 35 TO 50	+ 32.6 psf	- 35.7 psf	+ 32.6 psf	- 41.8 psf
△ 50 TO 100	+ 31.6 psf	- 34.6 psf	+ 31.6 psf	- 39.8 psf
△ 100 AND UP	+ 30.0 psf	- 33.0 psf	+ 30.0 psf	- 36.7 psf

TABLE 10602.2B OF F.B.C. 2001

NOTE:
 1) END ZONE CALCULATION SHALL BE DETERMINED BY THE TOP OF BEAM HEIGHT AT LOCATION OF OPENING LESS 3' FROM CORNER FOR 8'-0" HEIGHT, 4' FROM CORNER FOR 10'-0" HEIGHT, 5' FROM CORNER FOR 12' HEIGHT.

